

6mm [1/4"]
HARDWOOD EDGE
TO MATCH FACE

19mm [3/4"]
MDF STILE

25mm [1"] MDF TOP & BOTTOM CAPS

DOOR FACE:
3mm [1/8"] HARDBOARD

CORE:
Uni-Cor FR 45
Fire Resistant Particleboard

45min FIRE-RATED

AVAILABLE DOOR SIZES:

Pairs - Conventional 8/0 x 8/0
Pairs - Double Egress 8/0 x 8/0

Standard Thickness - 1-3/4" ONLY


Maximum Exposed Wired Glass
size is 1296 sq. inches; not larger
tha 54" in any direction
Maximum Exposed Ceramic Glass
is unlimited but must maintain at
least 6" of door material remaining
all around

Lites (Window Cut-outs) require
Metal Frame "Vision" Lite Kits to
maintain Fire-Rating. Glass (by
others) thickness is required at
time of order or will be assumed
6mm, if not otherwise specified.
See 110 Glazing Kit

NET DOOR HEIGHT

NET DOOR WIDTH

EDGE DETAIL
#2 (AWMAC Type 'A') ONLY

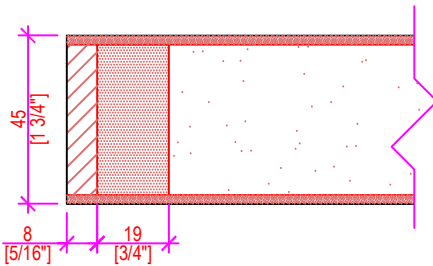

A-A DOOR EDGE DOOR SECTION
SCALE: 6" = 1'-0"

 <small>Manufacturers of Fine Quality Millwork Doors & Paneling</small> 1150 Sanford Street Ph: (204) 786-1411 Fax: (204) 786-2634 Winnipeg, MB R3E 2Z9 www.dormonddoors.com	Date: MAR 10, 2021
	Revision:
Drawing: DFD-3-45P 45min Rated	
Drawn By: A.D.	Sheet: 1 of 1