

90min FIRE-RATED

AVAILABLE DOOR SIZES:


Single Swing 4/0 x 10/0

Standard Thickness - 1-3/4"

Maximum Exposed Wired Glass size is 100 sq. inches
Maximum Exposed Ceramic Glass is 1296 sq. inches; not larger than 54" in any direction

STILES:


40mm [1 9/16"] ADVANCED TECHNOLOGY
90min FIRE-RATED STILE c/w INTEGRATED
8mm [5/16"] FIRE-RETARDANT TREATED
SOLID MAPLE DOOR EDGES

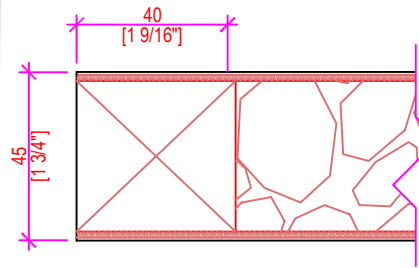

A-A PARTIAL PLAN SECTION

SCALE: 6" = 1'-0"

NET DOOR HEIGHT

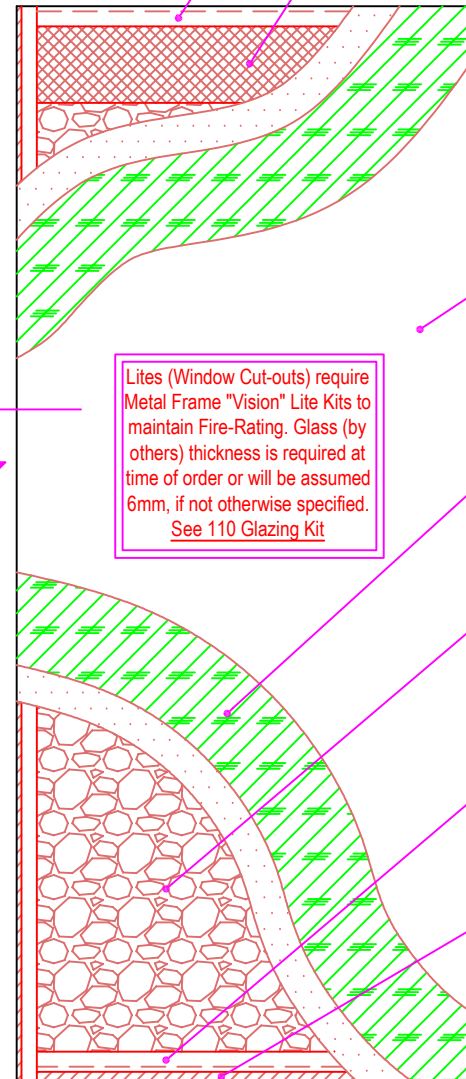

TOP RAIL:
ADVANCED TECHNOLOGY
90min FIRE-RATED COMPONENT

TOP BLOCKING:
152mm [6"] TECTONITE BLOCKING
[FOR DOOR CLOSERS]

Lites (Window Cut-outs) require
Metal Frame "Vision" Lite Kits to
maintain Fire-Rating. Glass (by
others) thickness is required at
time of order or will be assumed
6mm, if not otherwise specified.
See 110 Glazing Kit

DOOR FACE:
WOOD VENEER SPECIES OR
PLASTIC LAMINATE [GP thickness] OR
ALTERNATE DOOR FINISH [as requested]

CROSSBAND:
2.3mm [3/32"] COMPOSITE HDF

CORE:
90min FIRE-RATED
MINERAL CORE

BOTTOM RAIL:
ADVANCED TECHNOLOGY
90min FIRE-RATED COMPONENT

SOLID WOOD BOTTOM CAP

NET DOOR WIDTH

DORMOND
INDUSTRIES LIMITED

Manufacturers of Fine Quality Millwork Doors & Paneling
1150 Sanford Street Ph: (204) 786-1411 Fax: (204) 786-2634
Winnipeg, MB R3E 2Z9 www.dormonddoors.com

Date:
MAR 10, 2021

Revision:

Drawing: DFD-7-90 90min Rated

Drawn By:
A.D.

Sheet:
1 of 1